BixLink International Ltd.
No.206, Taode Rd., Bade Dist.,
Taoyuan City 33450, Taiwan,R.O.C.
Tel: +886-3-366-6906 Fax: +886-3-366-6962

Data Sheet for CR2325

Battery Type	CR2325
Nominal Voltage	3 V
Nominal Capacity	210mAh
Standard Load	15 KΩ
Standard Current	0.2 mA
Max. Continuous Current	3 mA
Max Pulse Current	18mA
Operating Temperature	-20~60℃
Weight	3.17 (g)
Chemistry	Lithium / Manganese Dioxide

Dimensions (mm)



A	$\Phi 20.55^{+0}_{-0.04}$
B	$\Phi 23.00^{+0}_{-0.15}$
C	$1.87^{+0.02}_{-0.02}$
D	$2.50^{+0}_{-0.2}$

Note: Capacity 210mAh is obtained at standard cc load to 2.0V at 23℃.

Discharge Characteristics

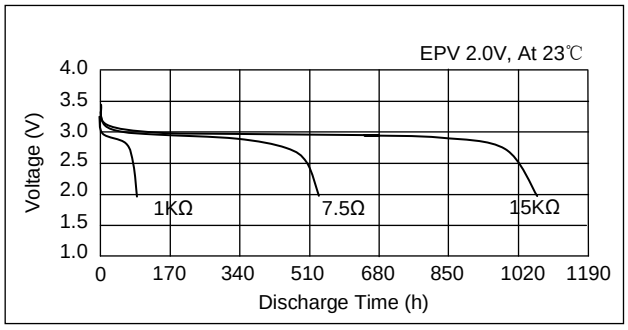

Temperature Characteristics

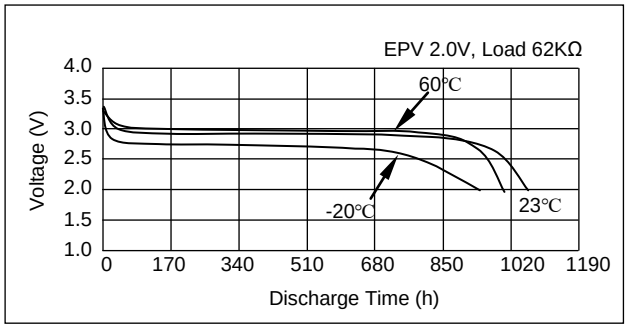

Pulse Discharge Characteristics

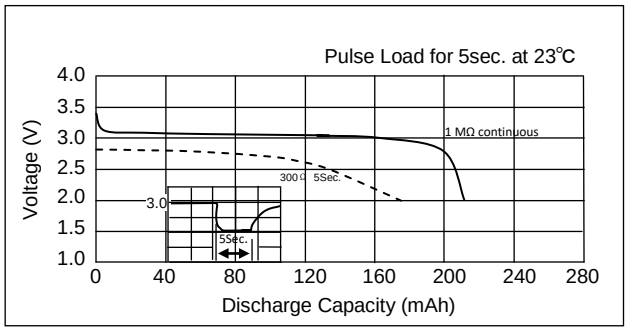

Load vs. Capacity

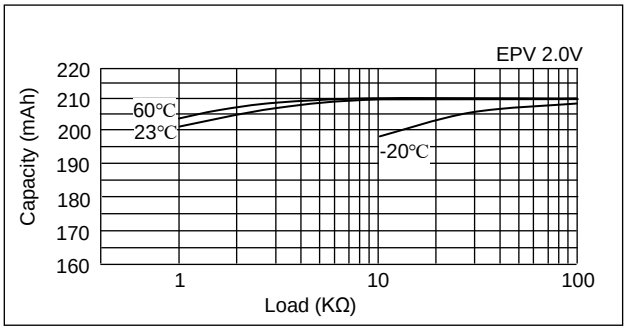

All data contained herein is for single cell and may vary for cell with specific configuration, subject to change without prior notice.